



产品规格承认书

Product Specification For Approval

产品名称(Product Name):	5A硬件主动均衡/5A Active Balance Module	
产品型号 (Product Number):	DL-J08 (5A) /DL-J16(5A)	
客户名 (Customer Name):		
客户料号(Customer P/N):		
送样日期: (Sample delivery date):	版次 (Version)	文件编号 (Document No.)
	A5	
编制(Prepared by)	核准(Approved)	审核(Audit)
Mo Yepeng	Yang Weihao	Yan Lianhong
客户确认栏 Customer Confirmation		
确认意见: Confirmation:		
客户签章Signature:		
日期Date:		
注意 (Note) :		
<p>1.收到样机确认OK后请及时回签, 7天内没有回签及问题反馈, 我司默认客户测试合格; 规格书中的图片为通用机型图片, 可能与送样样机有差异, 此份规格书达锂电子保留最终解释权.After receiving the prototype to confirm OK, please sign back in a timely manner, within 7 days without signing back and problem feedback, our default customer test qualified; specifications in the picture for the general model picture, may be different from the delivery of the prototype, this specification by the Dongguan Daly Electronics Co.</p> <p>2.客户批量前, 请在规格书中签字回传, 并说明详细功能说明, 我司才安排批量 Before the customer batches, please sign the specification and return it, and explain the detailed function description, and our company will arrange the batch.</p>		



目录

Catalogue

1. 概述 Introduction.....	3
2. 主要参数 Technical specification.....	4
3. 尺寸图 dimensional drawing.....	5
4. 接口定义说明 Interface definition description.....	6
5. 包装清单 Packing list.....	6
6. 接线使用说明 Wiring instructions.....	7



1. 概述 Introduction

因电池的容量、内阻和电压等参数值不能完全一致，这种差异导致充电时容量最小的电池容易过充，过放，受损后最小的电池容量变得更小，进入恶性循环。单体电池性能的优劣直接影响到整组电池的充放电特性及电池组容量降低。没有均衡功能的BMS只是一个数据采集器，很难称得上是管理系统。本产品为电容式主动均衡模块，可以实现最大5A均衡电流，利用开关矩阵配合电容充放电转移能量而非多余电量损耗。当电池出现稍微的压差，立即启动均衡控制电作为能量传递的载体。可以实现能量在电池组任意两个单体之间的直接转移。

Because the battery capacity, internal resistance and voltage and other parameter values can not be completely consistent, this difference leads to the charging of the smallest capacity of the battery is easy to overcharge, over-discharge, after the damage to the smallest battery capacity becomes even smaller, into a vicious circle. The performance of a single battery directly affects the charging and discharging characteristics of the whole battery and the capacity of the battery pack is reduced. BMS without equalization function is just a data collector, it can hardly be called a management system. This product is a capacitive active equalization module, which can achieve a maximum equalization current of 5A, using the switching matrix with the capacitor charging and discharging to transfer energy instead of excess power loss. When a slight pressure difference occurs in the battery, it immediately starts the equalization and control of electricity as a carrier of energy transfer. It can realize the direct transfer of energy between any two monomers in the battery pack.




2. 主要参数 Technical specification

指标 Index	参数 Specification	备注 Remarks
电池组类型 Battery group type	三元、铁锂 Li-ion、LiFePO4	
电池组串数 Number of battery strings	3串-16串，根据电池串数进行选择 3S-16S, Select based on the number of battery strings.	不同串数不可混用 Different battery strings can not be mixed
均衡电流 Balance current	≥5A (压差≥900mV时) ; ≥5A (Differential pressure≥900mV) ; ≥0.01A (压差≥10mV时) ; ≥0.01A (Differential pressure≥10mV)	峰值电流: 8A Peak current: 8A
均衡方式 Balance mode	主动均衡 Active Balance	
均衡开启条件 Balance on conditions	第一串单串电压≥3.1V First single string voltage≥3.1V	0.1V 精度公差 0.1V tolerance
均衡关闭条件 Balance off conditions	第一串单串电压≤3.0V First single string voltage≤3.0V	0.1V 精度公差 0.1V tolerance
工作功耗 Working power consumption	<1mA	
休眠电流 Sleep current	<100uA	
工作温度 working temperature	-20°C ~ 60°C	
尺寸 size	3~8S: 97*65*21mm 9~16S: 163*65*21mm	
均衡指示灯 Balance Indicator Light	亮: 均衡开启 ON: Balance on 灭: 未开启均衡/故障 OFF: Balance off or fault	




3. 尺寸图 dimensional drawing

3.1、DL-J08 (5A) , 电池串数: 3~8串 Strings:3~8S

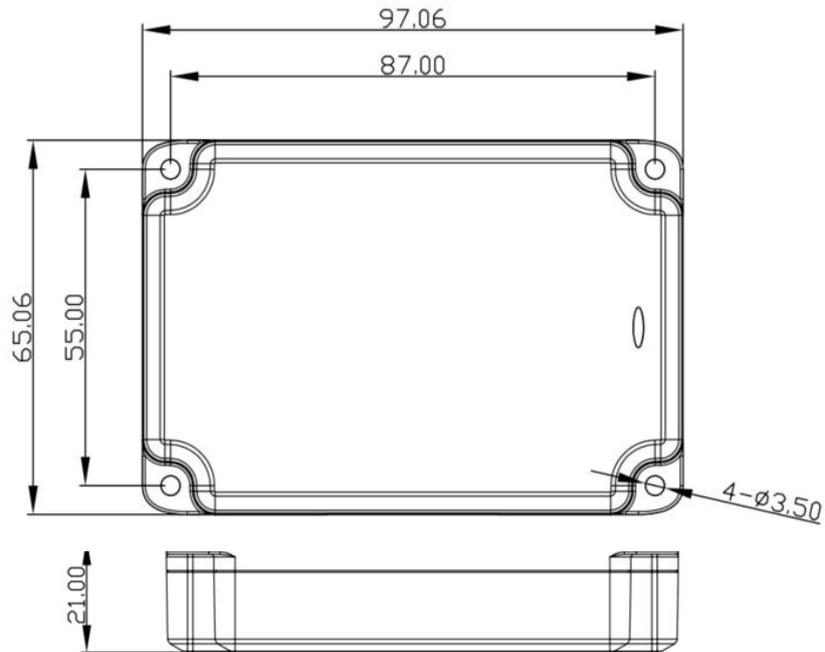

3.2、DL-J16 (5A) , 电池串数: 9~16串 Strings:9~16S

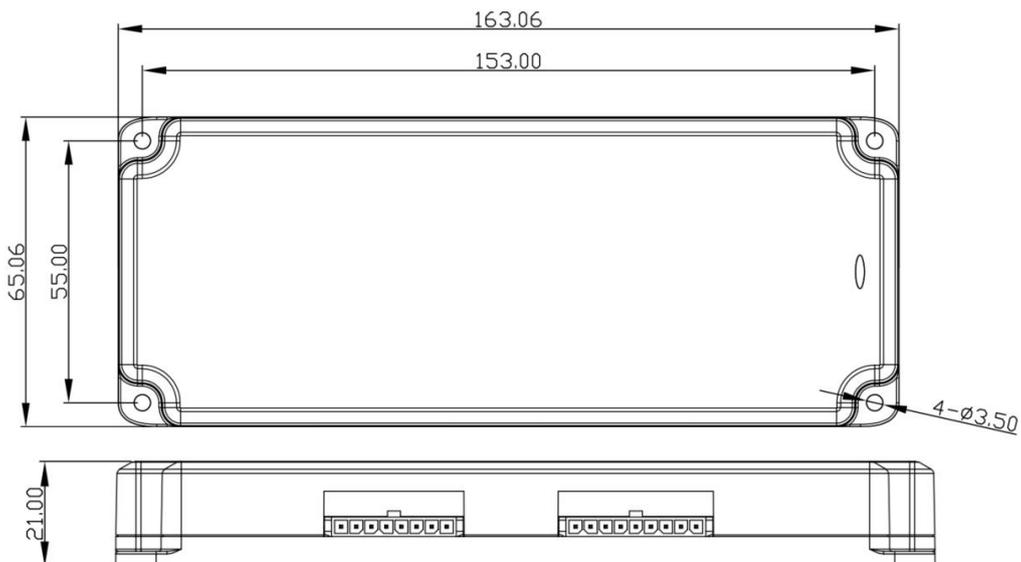



4. 接口定义说明 Interface definition description

名称 name	主动均衡 Active Balancer	Pin	标号 Sign	定义说明 Description of definition
采样线接口 (PHB 2.0带扣) Sampling wire (PHB 2.0 buckle)		1	B0	接第1节电池负级 Connect Section 1 Battery negative pole
		2	B1+	接第1节电池正级 Connect the positive pole of section 1 battery
		3	B2+	接第2节电池正级 Connect the positive pole of section 2 battery
		接最后1节电池正级 Connect the last 1 positive battery pole
注：3~8串为1个接口；9~16串以上为2个接口； Note: 3~8 strings are 1 interface; 9~16 strings are 2 interfaces;				

5. 包装清单 Packing list

名称 Name	默认规格 Default specification	数量 Pcs
主动均衡模块 Active Balance Module	5A 硬件主动均衡模块 5A Hardware Active Balance Module	1
线束 Wireharness (可定制) (Support customized)	采集线, L=450mm_MX3.0_20AWG Sampling Line,L=450mm_MX3.0_20AWG 黑色接负极, 红色接正极 The black wire connects to the negative pole of the battery, and the red wire harness connects to the positive poles	1 或 2 (小于等于8串为1, 大于8 串为2) 1 or 2 (Less than or equal to 8S is 1 lines, More than 8S is 2 lines,)



6. 接线使用说明 Wiring instructions

扫码查看说明书，或使用电脑浏览器登录：<https://www.dalyelec.com/service.html>

Scan the QRcode using the browser to view the user manual, or use a computer browser to access this website: <https://www.dalyelec.com/service.html>





修订记录

Revision record

日期 (Date)	版本号 (Version)	修订说明 (Note)	制表 (Tab)	核准 (Approve)
2023/8/20	A1	初版 First edition	杨伟涛	李天富
2023/10/7	A2	修正英文翻译 Corrected English translation	杨伟涛	徐丹
2023/10/13	A3	更新均衡电流描述 Updated balanced current description	杨伟涛	余宣飞
2023/10/31	A4	修改操作说明 Modify operation description	杨伟涛	徐丹,牧歌 李天富
2024/12/20	A5	修改操作说明 Modify operation description	杨伟涛	闫连红